

# ESKYDECK

EPS CONCRETE FORMING SYSTEMS




[www.eskydeck.com.au](http://www.eskydeck.com.au)


## SF 100 Panel Configurations

### QUICK SPECS

Average R Value 7.089  
Empty Form Weight 4.13 kg/sqM  
Concrete Weight 373.99 kg/sqM  
32.76 M of RIB/cubicM Concrete  
10 sqM of Slab /cubicM Concrete @ 100mm Thick  
Requires Continuous temporary support min  
150mm wide centered below beam section of form.

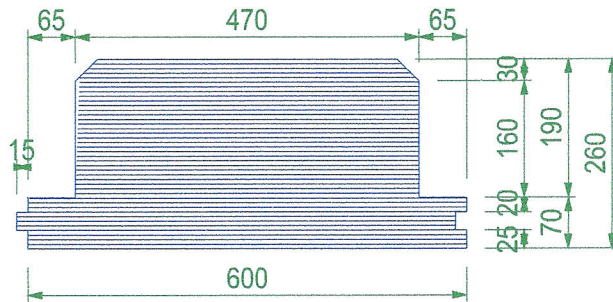

SF 100 PANEL  
DIMENSIONS

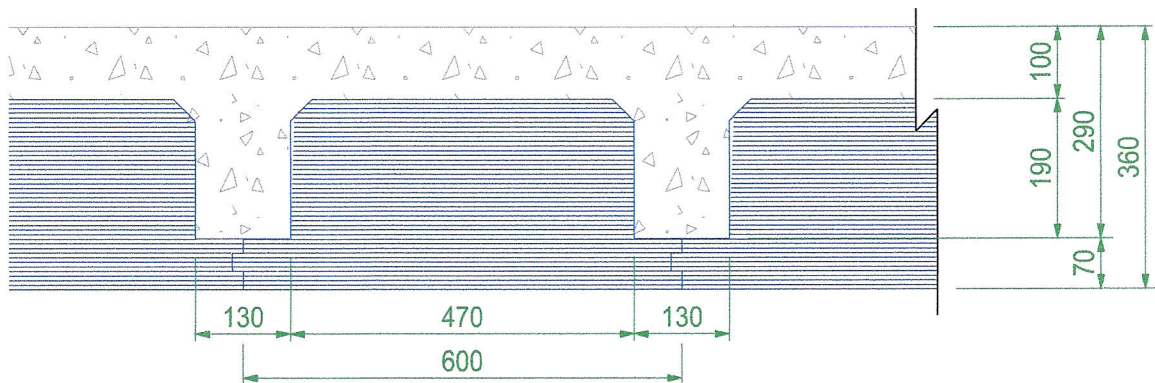

SF 100 PANEL  
/w 100mm SLAB

## SF (Steel Free) PANELS

SF PANELS USE NO STEEL BEAM JACKET AND ARE DESIGNED FOR USE WHERE NO UNDERSIDE FINISHES REQUIRING ATTACHMENT POINTS ARE REQUIRED OR WHERE THE STEEL BEAM JACKET IS UNDESIRABLE.

WATER TANK TOPS WHERE THE EPS CAN BE LEFT EXPOSED PROVIDES A FLAT TANK CEILING WITH NO EXPOSED STEEL TO CORODE.

SF PANELS ARE ALSO USED FOR SUSPENDED DECKS OR VERANDAS WHERE THE UNDERSIDE WILL BE RENDERED.

USED FOR TILT UP APPLICATIONS THE SF PANEL CAN BE USED TO FORM ANY SIZE WALL PANEL ON LEVEL GROUND REQUIRING NO CASTING SLAB OR TABLE

EPS IS NORMALLY FACED TO EXTERIOR SIDE AND RENDERED OR WATER PROOFED WHEN BURIED WITH EARTH.


© Copyright

This drawing and the information contained in this document are protected under copyright laws as well as possible patent or patent pending.

Any use of this information in whole or in part for anything not authorised by David Wester of Red Deer, Alberta, Canada is Forbidden and will be considered copyright or patent infringement.

# ESKYDECK

EPS CONCRETE FORMING SYSTEMS




[www.eskydeck.com.au](http://www.eskydeck.com.au)


## SF 140 Panel Configurations

### QUICK SPECS

Average R Value 7.089  
Empty Form Weight 4.58 kg/sqM  
Concrete Weight 373.99 kg/sqM  
32.76 M of RIB/cubicM Concrete  
10 sqM of Slab /cubicM Concrete @ 100mm Thick  
Requires Continuous temporary support min  
150mm wide centered below beam section of form.

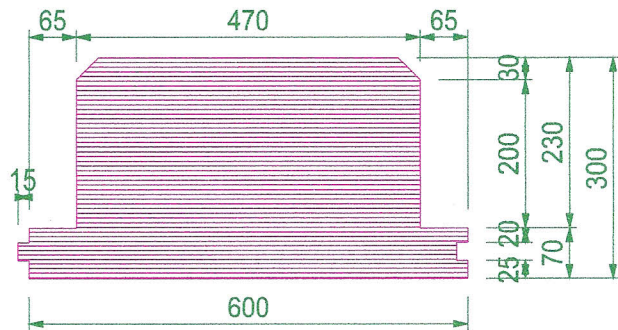

SF 140 PANEL  
DIMENSIONS

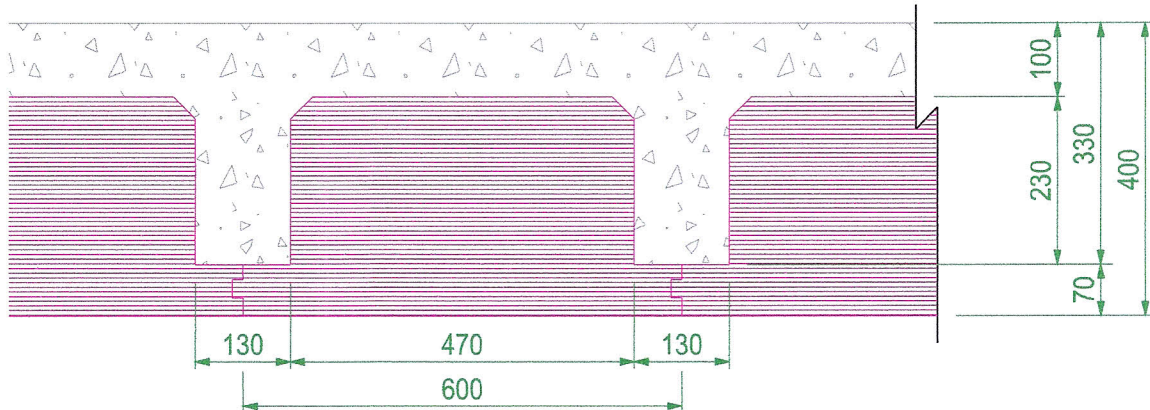

SF 140 PANEL  
/w 100mm SLAB

## SF (Steel Free) PANELS

SF PANELS USE NO STEEL BEAM JACKET AND ARE DESIGNED FOR USE WHERE NO UNDERSIDE FINISHES REQUIRING ATTACHMENT POINTS ARE REQUIRED OR WHERE THE STEEL BEAM JACKET IS UNDESIRABLE. WATER TANK TOPS WHERE THE EPS CAN BE LEFT EXPOSED PROVIDES A FLAT TANK CEILING WITH NO EXPOSED STEEL TO CORODE. SF PANELS ARE ALSO USED FOR SUSPENDED DECKS OR VERANDAS WHERE THE UNDERSIDE WILL BE RENDERED. USED FOR TILT UP APPLICATIONS THE SF PANEL CAN BE USED TO FORM ANY SIZE WALL PANEL ON LEVEL GROUND REQUIRING NO CASTING SLAB OR TABLE EPS IS NORMALLY FACED TO EXTERIOR SIDE AND RENDERED OR WATER PROOFED WHEN BURIED WITH EARTH.

© Copyright

This drawing and the information contained in this document are protected under copyright laws as well as possible patent or patent pending.

Any use of this information in whole or in part for anything not authorised by David Wester of Red Deer, Alberta, Canada is Forbidden and will be considered copyright or patent infringement.

# ESKYDECK


EPS CONCRETE FORMING SYSTEMS

[www.eskydeck.com.au](http://www.eskydeck.com.au)


## SF 190 Panel Configurations

### QUICK SPECS

Average R Value 8.192  
Empty Form Weight 5.469 kg/sqM  
Concrete Weight 394.79 kg/sqM  
27.99 M of RIB/cubicM Concrete  
10 sqM of Slab /cubicM Concrete @ 100mm Thick  
Requires Continuous temporary support min  
150mm wide centered below beam section of form.

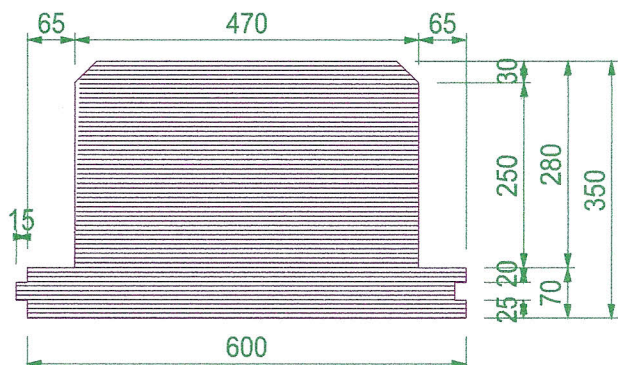

SF 190 PANEL  
DIMENSIONS

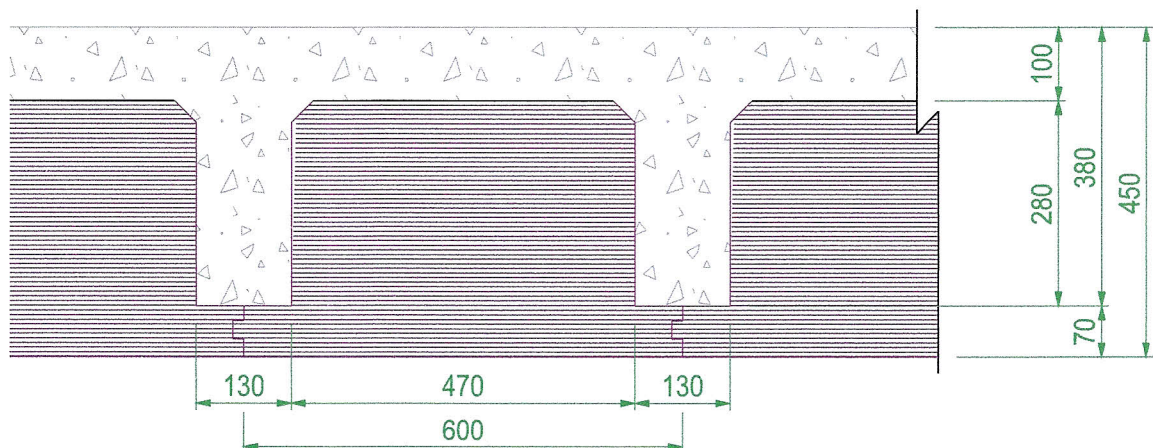

SF 190 PANEL  
/w 100mm SLAB

## SF (Steel Free) PANELS

SF PANELS USE NO STEEL BEAM JACKET AND ARE DESIGNED FOR USE WHERE NO UNDERSIDE FINISHES REQUIRING ATTACHMENT POINTS ARE REQUIRED OR WHERE THE STEEL BEAM JACKET IS UNDESIRABLE. WATER TANK TOPS WHERE THE EPS CAN BE LEFT EXPOSED PROVIDES A FLAT TANK CEILING WITH NO EXPOSED STEEL TO CORODE. SF PANELS ARE ALSO USED FOR SUSPENDED DECKS OR VERANDAS WHERE THE UNDERSIDE WILL BE RENDERED. USED FOR TILT UP APPLICATIONS THE SF PANEL CAN BE USED TO FORM ANY SIZE WALL PANEL ON LEVEL GROUND REQUIRING NO CASTING SLAB OR TABLE EPS IS NORMALLY FACED TO EXTERIOR SIDE AND RENDERED OR WATER PROOFED WHEN BURIED WITH EARTH.

© Copyright

This drawing and the information contained in this document are protected under copyright laws as well as possible patent or patent pending.

Any use of this information in whole or in part for anything not authorised by David Wester of Red Deer, Alberta, Canada is Forbidden and will be considered copyright or patent infringement.

# ESKYDECK


EPS CONCRETE FORMING SYSTEMS

[www.eskydeck.com.au](http://www.eskydeck.com.au)


## SF 240 Panel Configurations

### QUICK SPECS

Average R Value 8.192  
Empty Form Weight 5.469 kg/sqM  
Concrete Weight 394.79 kg/sqM  
27.99 M of RIB/cubicM Concrete  
10 sqM of Slab /cubicM Concrete @ 100mm Thick  
Requires Continuous temporary support min  
150mm wide centered below beam section of form.

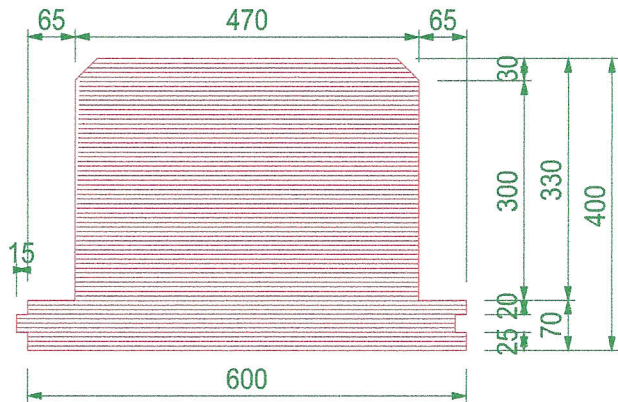

SF 240 PANEL  
DIMENSIONS

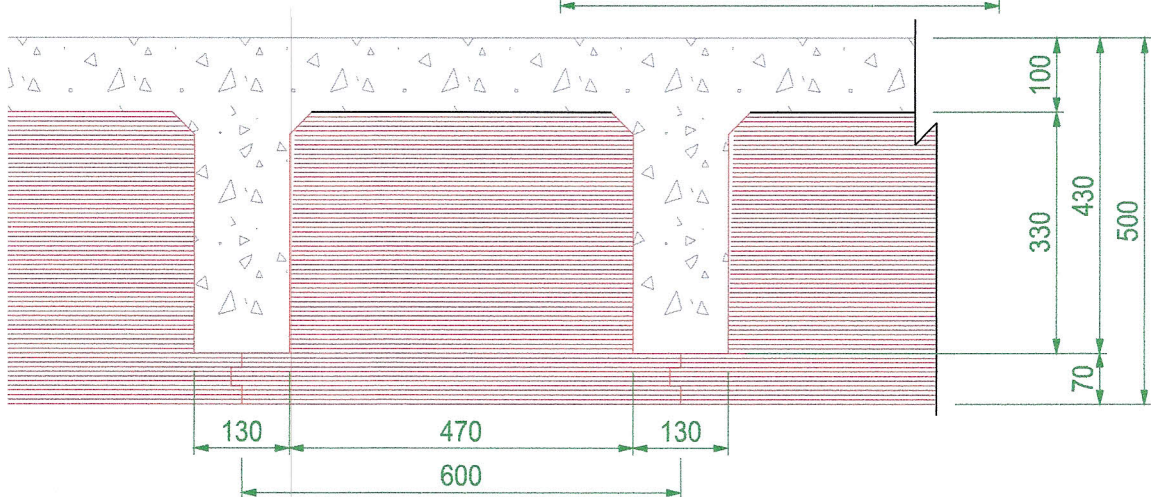

SF 240 PANEL  
/w 100mm SLAB

### SF (Steel Free) PANELS

SF PANELS USE NO STEEL BEAM JACKET AND ARE DESIGNED FOR USE WHERE NO UNDERSIDE FINISHES REQUIRING ATTACHMENT POINTS ARE REQUIRED OR WHERE THE STEEL BEAM JACKET IS UNDESIRABLE. WATER TANK TOPS WHERE THE EPS CAN BE LEFT EXPOSED PROVIDES A FLAT TANK CEILING WITH NO EXPOSED STEEL TO CORODE. SF PANELS ARE ALSO USED FOR SUSPENDED DECKS OR VERANDAS WHERE THE UNDERSIDE WILL BE RENDERED. USED FOR TILT UP APPLICATIONS THE SF PANEL CAN BE USED TO FORM ANY SIZE WALL PANEL ON LEVEL GROUND REQUIRING NO CASTING SLAB OR TABLE EPS IS NORMALLY FACED TO EXTERIOR SIDE AND RENDERED OR WATER PROOFED WHEN BURIED WITH EARTH.

© Copyright

This drawing and the information contained in this document are protected under copyright laws as well as possible patent or patent pending.

Any use of this information in whole or in part for anything not authorised by David Wester of Red Deer, Alberta, Canada is Forbidden and will be considered copyright or patent infringement.